


Stagnation Resistance of Hydraulic Connectors for Solar Thermal Applications

Trade name:	SudoPress <i>Carbon steel fitting with Viton O-Ring and carbon steel tubes</i>
Type:	Pressfitting
Company:	Aalberts integrated piping systems B.V.
Certificate No:	SPF16-157SRHC
Validity:	05.2016 – 05.2026

The hydraulic connectors **SudoPress 1.0034 carbon steel fitting with Viton O-Ring and 1.0034 carbon steel tubes** for solar thermal applications, made by **Aalberts integrated piping systems B.V.** in **NL-1212 AA Hilversum** fulfil the requirements of the SPF-certification procedure "Stagnation Resistance of Hydraulic Connectors in Solar Thermal Applications" version 1.1 (Test report J157-2SRHC). The connectors are considered as suitable for a lifetime exceeding 20 year when used in standard solar thermal installations and therefore have been awarded with the SPF quality certificate **SPF16-157SRHC**.

This certificate covers the following sizes and subtypes:
**SudoPress carbon steel fitting Ø12 mm (DN10) to Ø54 mm (DN50)
with Viton O-Ring and 1.0034 carbon steel tubes.**

The validity of this certificate can be checked under www.spf.ch



Dr. Andreas Bohren
Head of SPF Testing
Rapperswil, 17.08.2021 (prolonged)

Company	Aalberts integrated piping systems B.V. NL-1212 AA Hilversum
Product	SudoPress 1.0034 carbon steel fitting with Viton O-Ring and 1.0034 carbon steel tubes Pressfitting for Solar Thermal Applications Dimension Ø12 mm (DN10) to Ø54 mm (DN50)
Test	SPF Test procedure "Stagnation Resistance of Hydraulic Connectors in Solar Thermal Applications" version 1.1
Validity	05.2016 – 05.2026

Identification



Fig. 1 Fitting before installation



Fig. 2 Viton O-Ring (green)



Fig. 3 Pressed Fitting

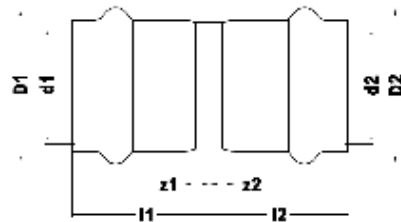


Fig. 4: Dimensions (Example DN25)
d1 = 28 mm; D1 = 37 mm
l1, l2 = 30 mm; z1, z2 = 6 mm

Rapperswil, 17.08.2021 (prolonged)

Dr. Andreas Bohren
Head of SPF Testing